

# KOMATSU

## D155AX-8

*EU Stage V Engine*

**CRAWLER DOZER**

# D155AX



**ENGINE POWER**

268 kW / 360 HP @ 1.900 rpm

**OPERATING WEIGHT**

41.690 kg

**BLADE CAPACITY**

SIGMADOZER® 9,4 m³  
Semi-U blade 9,4 m³  
U blade 11,9 m³

# Walk-Around

D155AX-8



## ENGINE POWER

268 kW / 360 HP @ 1.900 rpm

## OPERATING WEIGHT

41.690 kg

## BLADE CAPACITY

SIGMADOZER® 9,4 m<sup>3</sup>  
Semi-U blade 9,4 m<sup>3</sup>  
U blade 11,9 m<sup>3</sup>



## **OUTSTANDING PRODUCTIVITY & FUEL ECONOMY**

### ***Powerful and Environmentally Friendly***

- Low consumption EU Stage V engine
- Unique torque converter with auto lock-up
- Adjustable auto idle shutdown
- Hydrostatic cooling fan with cleaning mode

### ***Optimised Work Equipment***

- Highly efficient Sigmadozer® blade
- Dual tilt blades with hydraulic pitch
- Automatic blade pitch and ripper return

### ***First-Class Operator Comfort***

- Quiet and comfortable cab
- Fully adjustable air-suspended seat
- Integrated rear-view camera

### ***State-of-the-Art Controls***

- Hydrostatic steering system
- Gearshift preset function
- Palm Command Control System (PCCS)
- Large multifunctional monitor with troubleshooting function

### ***Tough and Reliable***

- Low-drive undercarriage
- Sturdy, rugged design
- K-Bogie undercarriage system
- Extra long life “PLUS” undercarriage (option)

### ***KOMTRAX***

- Komatsu Wireless Monitoring System
- 3G mobile communications
- Integrated communication antenna
- Increased operational data and fuel savings



A maintenance program  
for Komatsu customers

# Powerful and Environmentally Friendly



## Automatic transmission


Set by default, the D155AX-8 has a highly efficient transmission that automatically matches the best gear mode in all dozing operations and includes a travel speed preset function to reduce work time and fatigue for the operator. With Komatsu's ECMV (Electronic Controlled Modulation Valves) gear changes are smoothly timed to always keep the power transfer at maximum efficiency.

## Torque converter with auto lock-up

Combined with the automatic transmission, the exclusive Komatsu automatic lock-up torque converter reduces fuel consumption by up to 10% by eliminating unnecessary power loss. When required, the powertrain control system engages the torque converter, or locks it up to send full engine power directly to the transmission during less torque demanding applications.

## Adjustable idle shutdown

To reduce unnecessary fuel consumption and exhaust emissions, and for lower operating costs, the Komatsu auto idle shutdown automatically turns off the engine after it idles for a set period of time, which can be easily programmed from 5 to 60 minutes. An Eco-gauge and Eco guidance tips on the cab monitor further encourage efficient operations.

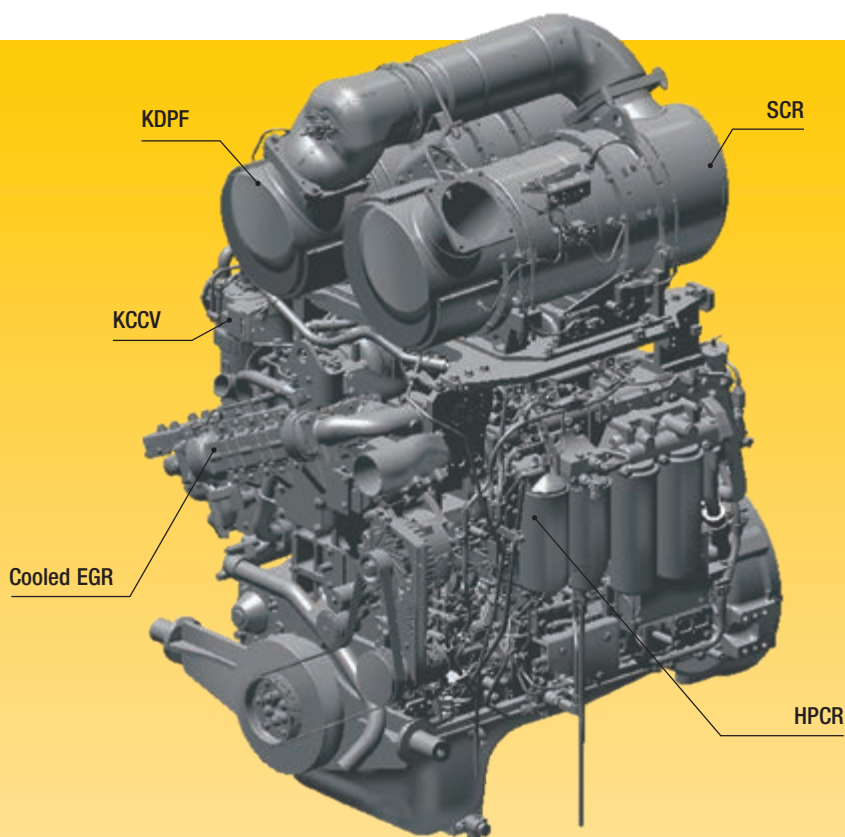

#### Exhaust Gas Recirculation (EGR)

Cooled EGR is a technology well-proven in current Komatsu engines. The increased capacity of the EGR cooler now ensures very low NOx emissions and a better engine performance.

#### High-Pressure Common Rail (HPCR)

To achieve complete fuel burn and lower exhaust emissions, the heavy-duty High-Pressure Common Rail fuel injection system is computer controlled to deliver a precise quantity of pressurised fuel into the redesigned engine combustion chamber by multiple injections.

#### Komatsu Closed Crankcase Ventilation (KCCV)

Crankcase emissions (blow-by gas) are passed through a CCV filter. The oil mist trapped in the filter is returned back to the crankcase while the filtered gas is returned to the air intake.

#### Variable Geometry Turbo (VGT)


The VGT provides optimal airflow to the engine combustion chamber under all speed and load conditions. Exhaust gas is cleaner, fuel economy is improved while machine power and performance are maintained.

## Komatsu EU Stage V

The Komatsu EU Stage V engine is productive, dependable and efficient. With ultra-low emissions, it provides a lesser environmental impact and a superior performance to help reduce operating costs and lets the operator work in complete peace of mind.

## Heavy-duty aftertreatment

The aftertreatment system combines a Komatsu Diesel Particulate Filter (KDPF) and Selective Catalytic Reduction (SCR). The SCR system injects the correct amount of AdBlue® at the proper rate to break down NOx into water (H<sub>2</sub>O) and nontoxic nitrogen gas (N<sub>2</sub>). NOx emissions are reduced by 80% vs. EU Stage IIIB engines.

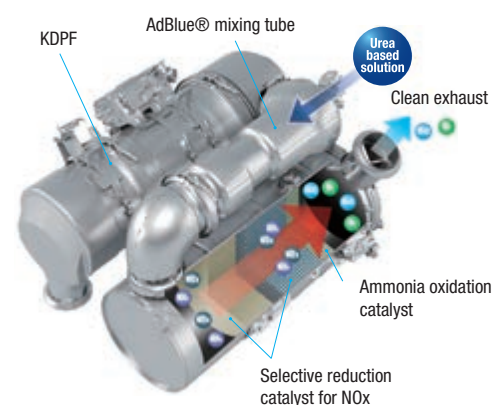

Automatic gearshift mode to further reduce fuel consumption



Eco-gauge, Eco guidance and fuel consumption gauge



Fuel consumption history

# Optimised Work Equipment

## Komatsu blades

For increased blade performance and better machine balance, Komatsu uses a box blade design, with the highest resistance for a light weight blade. Special Komatsu highly wear resistant steel is used for the front and sides of the blade to increase durability. The deep curved design of the blade makes it easy to handle a wide range of materials, with good penetration and a large capacity, optimising high dozing performance with excellent fuel efficiency.

## Automatic blade pitch and ripper return


To reduce operator effort and increase efficiency while dozing, a new “auto pitch” mode, triggered by a simple switch, sets the blade pitch between “digging” and “dump” positions. Additionally, a new ergonomic ripper control lever with an auto-return function automatically raises the ripper when moved into reverse.

## Komatsu rippers

Komatsu’s ripper concept, with all cylinders connected to the ripper shank holder, allows maximum pry-out force. Its key feature is the ripper point movement that lifts the material during the ripper shank operation to greatly improve overall performance. The shank supplies great penetration into various types of materials and is fitted with special wear parts for increased longevity.

## Sigmodozer® blade

The middle section of Komatsu’s Sigmodozer® blade acts like a V-shaped bucket with aggressive ground penetration. Its lateral blade edges help to push the rolling material continuously towards the centre. Combined with the blade’s deep curve, this largely increases effective capacity and reduces spillage and fuel consumption. The blade’s flat cutting edge and the standard pitch function also offer top grading performance. Overall, the Sigmodozer® blade increases dozing productivity by more than 15% compared to a conventional Semi-U blade.

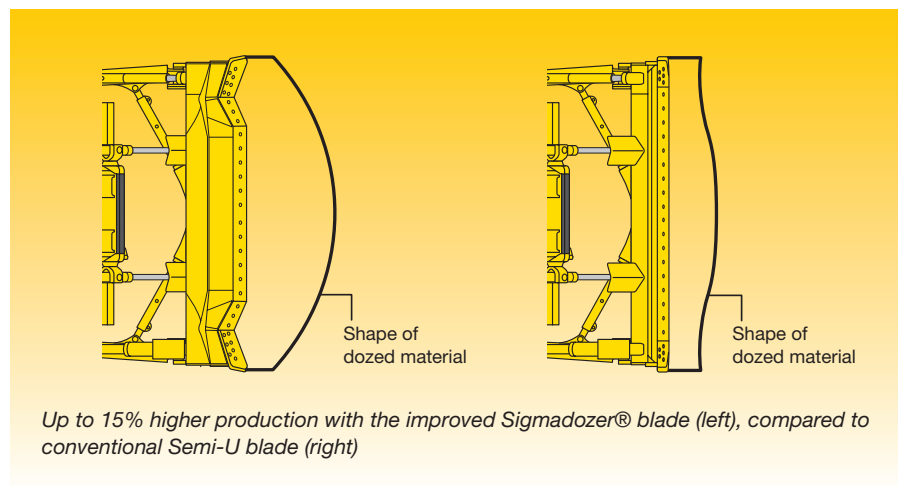

The Sigmodozer® blade offers highest material holding capacity



Semi-U blade



# First-Class Comfort

## Quiet and comfortable cab

Operator comfort is essential for safe and productive work. The cab on the D155AX-8 is quiet and comfortable, an ideal environment to concentrate on the job. Its hexagonal design and large tinted glass windows offer excellent panoramic visibility. The high capacity and fully automatic climate control system pressurises the cab to keep dust out. A high quality sound-absorbent lining covers the interior to minimise noise levels for the operator.

## Fully adjustable suspension seat and travel-control console

A comfortable, heavy-duty and fully adjustable heated air-suspended seat is at the centre of the operator's safe and cosy work space. For dozing operations, the seat faces straight forward, with a perfect view of both sides of the blade. For ripping, it can be turned 15° to the right to significantly improve rear visibility and reduce neck strain. The position of the travel control console can also be independently adjusted forwards, backwards and in height to fit each operator's preference.

## Superior visibility on blade and ripper

The redesigned ROPS/FOPS integrated cab and the well-located operator seat give optimal blade visibility to the left and right and make both dozing and grading easy, safe and fast. To further improve safety and ripping efficiency, the special shape of the fuel tank gives the operator a clear view of the ripper point and of the dozer's back side.



## State-of-the-Art Controls



### Hydrostatic steering system

The hydrostatic steering system (HSS) offers fast response and more precise turning. Both tracks are powered without interruption allowing smooth, continuous turns and powerful and productive dozing even on soft ground or on slopes.

### Gearshift preset function

To reduce the frequency of gear shifting and for comfortable machine operation, a shift preset mode is provided as standard equipment. The preset switch lets the operator select a combination of forward/reverse gear shifts by using the UP/DOWN shift switch on the steering lever. Once the shift pattern is selected, only forward/reverse direction control selection is required for a correct gear shift.

### Easy and precise

The ergonomic Palm Command Control System (PCCS) provides efficient and comfortable steering. The new control levers are fingertip controlled for precise and fatigue-free operating. When backing up over shot rock or other rough surfaces, travel speed can be reduced with the “slow reverse” function to improve ride quality and decrease vibrations and fuel consumption.

### Selectable working modes

Working mode can be set to either “Power” for maximum power or to “Economy” for energy saving operations. Combined with a choice between automatic or manual working mode, this lets the operator select the optimum machine power configuration for the work at hand.



*Palm Command Control System (PCCS)*



*Blade control lever with auto-pitch and new ripper control lever with auto-return function*



*Fully integrated rear-view camera system*

# Information & Communication Technology



## Lower operating costs

Komatsu ICT contributes to the reduction of operating costs by assisting to comfortably and efficiently manage operations. It raises the level of customer satisfaction and the competitive edge of our products.

## Widescreen monitor

Conveniently customisable and with a choice of 26 languages, the wide-screen monitor with simple switches and multifunction keys gives fingertip access to a large range of functions and operating info. An AdBlue® level gauge is now incorporated into the default main screen.

## An evolutionary interface

Helpful information is now easier than ever to find and understand with the upgraded monitor interface. The main screen can be simply optimised to the operator's preference by just pressing one button.



At a glance: operation logs



All information at a glance



Operator identification function

# KOMTRAX

## The way to higher productivity

KOMTRAX uses the latest wireless monitoring technology. Compatible on PC, smartphone or tablet, it delivers insightful and cost saving information about your fleet and equipment, and offers a wealth of information to facilitate peak machine performance. By creating a tightly integrated web of support it allows proactive and preventive maintenance and helps to efficiently run a business.



## Knowledge

You get quick answers to basic and critical questions about your machines – what they're doing, when they did it, where they're located, how they can be used more efficiently, and when they need to be serviced.

Performance data is relayed by wireless communication technology (Satellite, GPRS or 3G depending on model) from the machine to a computer and to the local Komatsu distributor – who's readily available for expert analysis and feedback.

## Power

The detailed information that KOMTRAX puts at your fingertips 24 hours a day, 7 days a week gives the power to make better daily and long-term strategic decisions – at no extra cost. Problems can be anticipated, maintenance schedules customised, downtime minimised and machines kept where they belong: working on the jobsite.

## Convenience

KOMTRAX enables convenient fleet management on the web, wherever you are. Data is analysed and packaged specifically for effortless and intuitive viewing in maps, lists, graphs and charts. You can foresee eventual maintenance issues and required spare parts, and troubleshoot a problem before Komatsu technicians arrive on site.



# Easy Maintenance



## Komatsu CARE™

Komatsu CARE™ is a maintenance program that comes as standard with your new Komatsu machine. It covers factory-scheduled maintenance, performed with Komatsu Genuine parts by Komatsu-trained technicians. Depending on your machine's engine, it also offers extended coverage of the Komatsu Diesel Particulate Filter (KDPF) or the Komatsu Diesel Oxidation Catalyst (KDOC), and of the Selective Catalytic Reduction (SCR). Please contact your local Komatsu distributor for terms and conditions.

## Reversible radiator fan

The radiator can be easily cleaned by utilisation of the reversible, hydraulically driven cooling fan from a touch on the monitor panel. This cleaning reduces fuel consumption and increases overall machine performance.




## Central service points

Komatsu designed the D155AX-8 with centralised and conveniently located service points to make necessary inspections and maintenance quick and easy.

## Modular power train

All the power train components are enclosed in a sealed module. This eliminates oil spills during mounting and dismounting, and prevents dust and dirt polluting individual components. Servicing is much cleaner, smoother and easier.

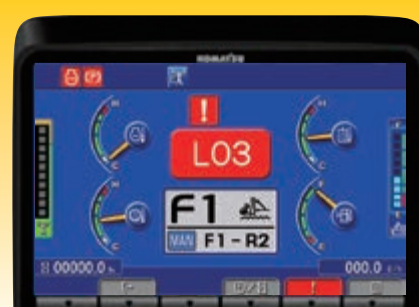

## Self-diagnostic monitor

The multifunction monitor panel displays the running time, engine revs, fuel level and water coolant temperature in real time. It also provides the operator with maintenance and service information, if oil filters need replacing or any abnormality occurs. In addition, it supplies Komatsu mechanics with detailed information, with no need for external service tools.



## Tough and Reliable

### Sturdy, rugged design

A high-rigidity hull structure main frame improves durability and reduces stress concentration at critical areas. The track frame with a large cross section utilises pivot shaft mounting for greater reliability. All hydraulic piping is robustly protected by cover and inner route to ensure damage protection from materials.

### K-Bogie undercarriage system

The K-Bogie undercarriage is built with flexible mounted bogie systems that allow a high vertical track roller movement. The 7 track roller/K-bogie design supports and guides the tracks on all ground conditions for a much smoother drive and a longer undercarriage life.

### Highly reliable electric circuit


The new generation of Komatsu dozers have special reinforced electrical wiring harnesses covered with a heat-resistant material that improves mechanical strength, provides longer life, and protects the system from damage. The reliability of the D155AX-8's electrical circuit is further increased by the use of "DT connectors" that have a very high resistance to dust, corrosion and moisture and keep your machine up and running.

### Protected hydraulic piping

Komatsu has designed the hydraulics of the working equipment so it minimises maintenance costs. All the hydraulic lines are well protected with special linings and embedded into the steel structures whenever possible.

### Low-drive "PLUS" undercarriage (option)

Komatsu's low-drive Parallel Link Undercarriage System (PLUS) is extraordinarily tough, with excellent grading performance and stability. It features PLUS link assemblies, a highly reliable floating bushing concept, substantial track link height, superior oil seals and track guards that maximise undercarriage durability. For easier servicing, the equaliser bar's centre pin is remotely greased. The segmented sprockets are notched to considerably improve the evacuation of mud and further increase the PLUS undercarriage lifetime.

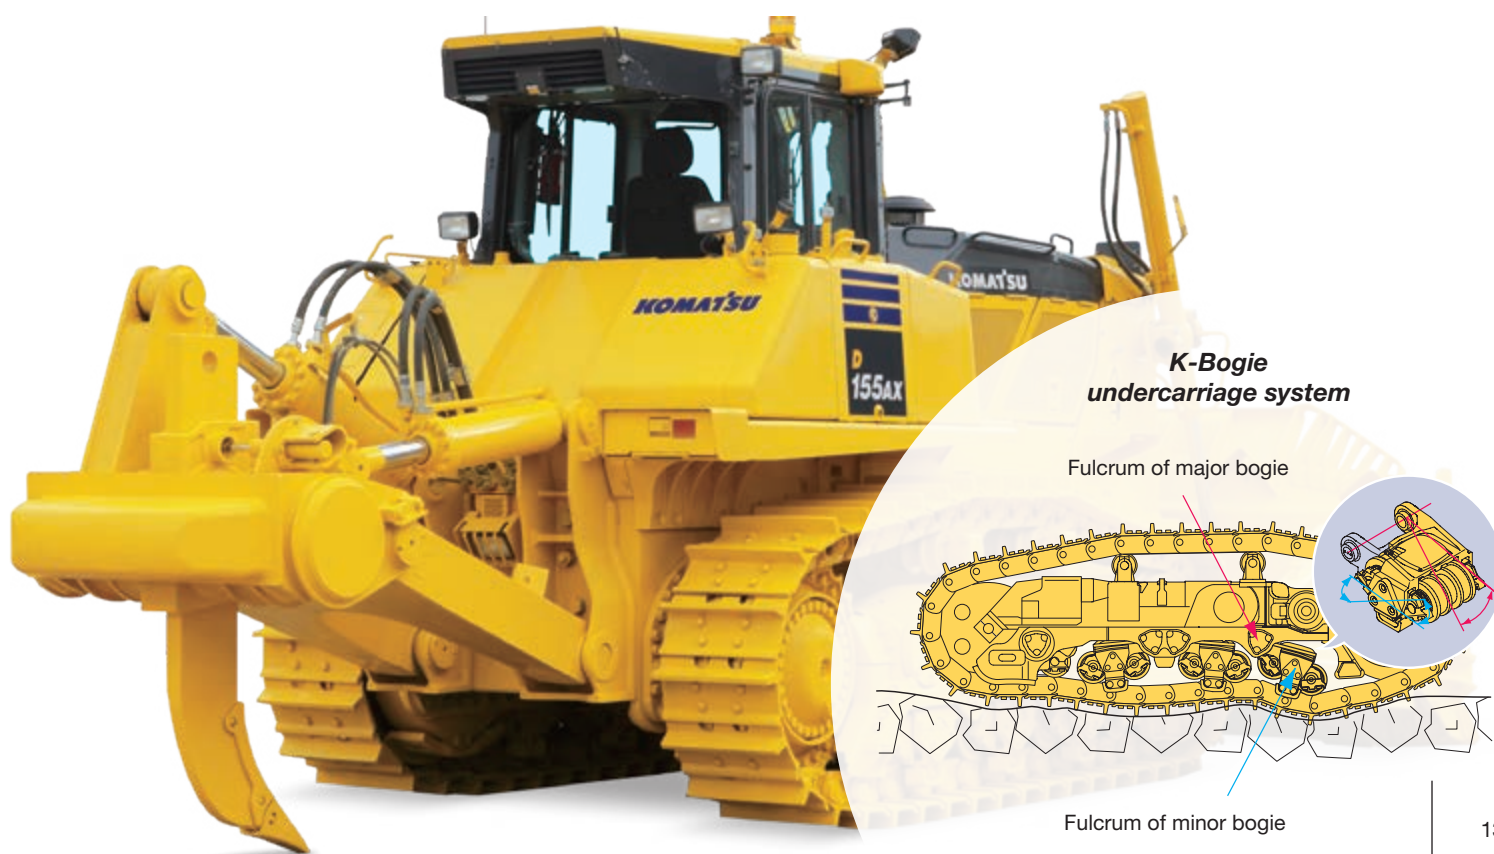

**K-Bogie undercarriage system**

Fulcrum of major bogie

Fulcrum of minor bogie

# Specifications

## ENGINE


|                             |                                                                                             |
|-----------------------------|---------------------------------------------------------------------------------------------|
| Model                       | Komatsu SAA6D140E-7                                                                         |
| Type                        | Common rail direct injection, water-cooled, emissionised, turbocharged, after-cooled diesel |
| Engine power                |                                                                                             |
| at rated engine speed       | 1.900 rpm                                                                                   |
| ISO 14396                   | 268 kW/360 HP                                                                               |
| ISO 9249 (net engine power) | 264 kW/354 HP                                                                               |
| No. of cylinders            | 6                                                                                           |
| Bore × stroke               | 140 × 165 mm                                                                                |
| Displacement                | 15,24 l                                                                                     |
| Fan drive type              | Hydraulic, reversible                                                                       |
| Lubrication system          |                                                                                             |
| Method                      | Gear pump, force lubrication                                                                |
| Filter                      | Full flow                                                                                   |

## ENVIRONMENT

|                                                                                                                       |                                                                 |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| Engine emissions                                                                                                      | Fully complies with EU Stage V exhaust emission regulations     |
| Noise levels                                                                                                          |                                                                 |
| LwA external                                                                                                          | 112 dB(A) (2000/14/EC Stage II)                                 |
| LpA operator ear                                                                                                      | 80 dB(A) (ISO 6396 dynamic test)                                |
| Vibration levels (EN 12096:1997)                                                                                      |                                                                 |
| Hand/arm                                                                                                              | ≤ 2,5 m/s <sup>2</sup> (uncertainty K = 0,79 m/s <sup>2</sup> ) |
| Body                                                                                                                  | ≤ 0,5 m/s <sup>2</sup> (uncertainty K = 0,24 m/s <sup>2</sup> ) |
| Contains fluorinated greenhouse gas HFC-134a (GWP 1430).<br>Quantity of gas 0,9 kg, CO <sub>2</sub> equivalent 1,29 t |                                                                 |

## MAX. TRAVEL SPEEDS

|       | Forward   | Reverse   |
|-------|-----------|-----------|
| 1st   | 3,5 km/h  | 4,3 km/h  |
| 2nd   | 5,6 km/h  | 6,8 km/h  |
| 3rd L | 7,5 km/h  | 9,2 km/h  |
| 3rd   | 11,6 km/h | 14,0 km/h |

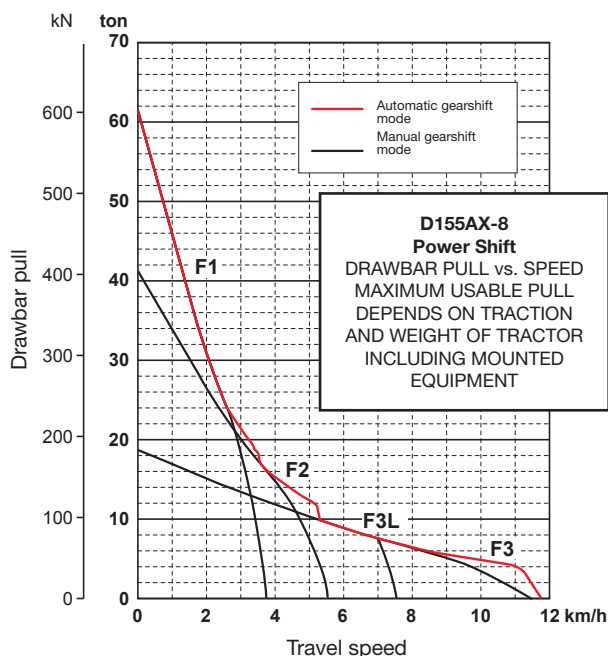

## STEERING SYSTEM

|                                                                                     |                                                                                  |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| Type                                                                                | Hydrostatic Steering System (HSS)                                                |
| Steering control                                                                    | PCCS-lever                                                                       |
| Service brakes                                                                      | Wet, multiple-disc, pedal-controlled, spring-actuated and hydraulically released |
| Minimum turning radius (counter-rotation)<br>(as measured by track marks on ground) | 2,14 m                                                                           |

## UNDERCARRIAGE

|                                 |                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------|
| Suspension                      | Oscillating equaliser bar and pivot shaft                                                          |
| Track roller frame              | Monocoque, large section, durable construction                                                     |
| K-Bogie undercarriage           | Lubricated track rollers are resiliently mounted on the track frame with a bogie suspension system |
| Tracks                          | Lubricated tracks, fully sealed                                                                    |
| Track tension                   | Combined spring and hydraulic unit                                                                 |
| Number of shoes (each side)     | 42                                                                                                 |
| Grouser height (single grouser) | 80 mm                                                                                              |
| Shoe width (standard)           | 610 mm                                                                                             |
| Ground contact area (ISO16754)  | 45.399 cm <sup>2</sup>                                                                             |
| Ground pressure (ISO16754)      | 0,92 kg/cm <sup>2</sup>                                                                            |
| Track rollers (each side)       | 7                                                                                                  |
| Carrier rollers (each side)     | 2                                                                                                  |

## OPERATING WEIGHT (APPR.)

Including strengthened Sigmadozer®, giant ripper, steel cab, ROPS, operator, standard equipment, rated capacity of lubricant, coolant, and full fuel tank

|                  |           |
|------------------|-----------|
| Operating weight | 41.690 kg |
|------------------|-----------|

## SERVICE REFILL CAPACITIES

|                                                                |        |
|----------------------------------------------------------------|--------|
| Fuel tank                                                      | 625 l  |
| Radiator                                                       | 104 l  |
| Engine oil                                                     | 37 l   |
| Damper                                                         | 1,5 l  |
| Torque converter, transmission, bevel gear and steering system | 90 l   |
| Dozer blade hydraulics                                         | 95 l   |
| Giant ripper (additional capacity)                             | 37 l   |
| Multishank ripper (additional capacity)                        | 37 l   |
| Final drive (each side)                                        | 31 l   |
| AdBlue® tank                                                   | 59,0 l |

## FINAL DRIVE

|          |                                                           |
|----------|-----------------------------------------------------------|
| Type     | Planetary gear, double-reduction                          |
| Sprocket | Segmented sprocket teeth are bolt-on for easy replacement |

## TORQFLOW TRANSMISSION

|                                                                           |                                                                               |
|---------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Type                                                                      | Komatsu TORQFLOW                                                              |
| Torque converter                                                          | 3-element, 1-stage, 1-phase, water-cooled, automatic lock-up                  |
| Transmission                                                              | Planetary gear, multiple-disc clutch hydraulically actuated, force-lubricated |
| Gearshift lock lever and neutral safety switch prevent accidental starts. |                                                                               |

## RIPPER EQUIPMENT

|                                           |                                          |
|-------------------------------------------|------------------------------------------|
| Multishank ripper                         |                                          |
| Type                                      | Hydraulically controlled variable ripper |
| No. of shanks                             | 3                                        |
| Weight (including hydraulic control unit) | 3.760 kg                                 |
| Beam length                               | 2.320 mm                                 |
| Maximum lift above ground                 | 950 mm                                   |
| Maximum digging depth                     | 900 mm                                   |
| Giant ripper                              |                                          |
| Type                                      | Hydraulically controlled variable ripper |
| No. of shanks                             | 1                                        |
| Weight (including hydraulic control unit) | 2.440 kg                                 |
| Beam length                               | 1.400 mm                                 |
| Maximum lift above ground                 | 950 mm                                   |
| Maximum digging depth                     | 1.240 mm                                 |

## HYDRAULIC SYSTEM




|                                                                |                                          |
|----------------------------------------------------------------|------------------------------------------|
| Type                                                           | CLSS (closed-centre load sensing system) |
| All spool valves externally mounted beside the hydraulic tank. |                                          |
| Main pump                                                      | Variable displacement piston pump        |
| Maximum steering pump flow                                     | 325 l/min                                |
| Relief valve setting                                           | 390 kg/cm <sup>2</sup>                   |
| Maximum implement pump flow                                    | 180 l/min                                |
| Relief valve setting                                           | 280 kg/cm <sup>2</sup>                   |
| Spool control valve positions                                  |                                          |
| Blade lift                                                     | Raise, hold, lower, and float            |
| Blade tilt                                                     | Right, hold, and left                    |
| Additional control valve positions for ripper                  |                                          |
| Ripper lift                                                    | Raise, hold and lower                    |
| Ripper tilt                                                    | Increase, hold and decrease              |
| Hydraulic cylinders                                            |                                          |
| No. of cylinders × bore                                        |                                          |
| Blade lift                                                     | 2 × 110 mm                               |
| Blade tilt                                                     | 2 × 160 mm                               |
| Ripper lift                                                    | 1 × 180 mm                               |
| Ripper tilt                                                    | 1 × 200 mm                               |

## DOZER EQUIPMENT

|                                     | Overall length with blade | Blade capacity      | Blade width × height | Max. lift above ground | Max. drop below ground | Max. tilt adjustment | Assembly weight |
|-------------------------------------|---------------------------|---------------------|----------------------|------------------------|------------------------|----------------------|-----------------|
| Strengthened Sigmadozer® dual tilt  | 6.300 mm                  | 9,4 m <sup>3</sup>  | 4.060 × 1.880 mm     | 1.315 mm               | 680 mm                 | 880 mm               | 5.900 kg        |
| Strengthened Semi-U blade dual tilt | 6.365 mm                  | 9,4 m <sup>3</sup>  | 4.130 × 1.790 mm     | 1.315 mm               | 600 mm                 | 880 mm               | 5.900 kg        |
| Strengthened U-Blade dual tilt      | 6.785 mm                  | 11,9 m <sup>3</sup> | 4.260 × 1.790 mm     | 1.315 mm               | 600 mm                 | 920 mm               | 6.170 kg        |

Blade capacities are based on the SAE recommended practice J1265.

## DIMENSIONS

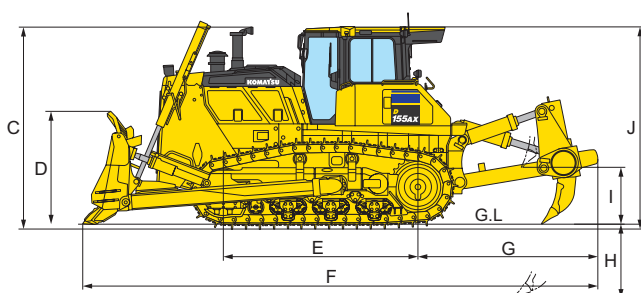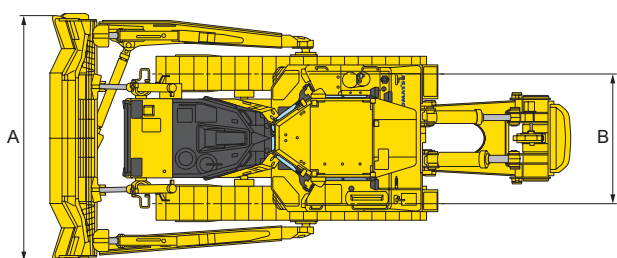

Ground clearance: 500 mm (+ grouser height)

D155AX-8  
Sigmadozer®

|   |          |
|---|----------|
| A | 4.060 mm |
| B | 2.140 mm |
| C | 3.385 mm |
| D | 1.850 mm |
| E | 3.275 mm |
| F | 8.700 mm |
| G | 3.045 mm |
| H | 1.240 mm |
| I | 950 mm   |
| J | 3.390 mm |

# Standard and Optional Equipment

## ENGINE AND RELATED PARTS

|                                                                             |   |
|-----------------------------------------------------------------------------|---|
| Komatsu SAA6D140E-7 turbocharged common rail direct injection diesel engine | ● |
| EU Stage V compliant                                                        | ● |
| Fuel pre-filter (10 micron) and fuel filter (2 micron)                      | ● |
| Intake pipe with rain cap                                                   | ● |
| Starting motor 24 V/11 kW                                                   | ● |
| Alternator 24 V/140 A                                                       | ● |
| Batteries 2 × 12 V/136 Ah                                                   | ● |
| Gull wing engine side covers                                                | ● |
| Cooling fan, hydrostatic driven with reversing function                     | ● |
| Fuel tank inlet strainer                                                    | ● |
| Electric type engine oil and coolant heater                                 | ○ |
| High-capacity batteries 2 × 12 V/220 Ah                                     | ○ |
| Cyclone type air pre-cleaner                                                | ○ |

## UNDERCARRIAGE

|                                                          |   |
|----------------------------------------------------------|---|
| Single grouser heavy-duty shoes (610 mm)                 | ● |
| Heavy-duty link assembly, sealed and lubricated          | ● |
| Segmented sprockets                                      | ● |
| K-Bogie system                                           | ● |
| Hydraulic track adjusters                                | ● |
| Single grouser heavy-duty shoes (560 mm, 660 mm, 710 mm) | ○ |
| Heavy-duty PLUS undercarriage                            | ○ |
| Full length track roller guard                           | ○ |

## SERVICE AND MAINTENANCE

|                                                                                                                              |   |
|------------------------------------------------------------------------------------------------------------------------------|---|
| Dry type air cleaner, double element with dust indicator and evacuator                                                       | ● |
| Water separator                                                                                                              | ● |
| Multifunction video compatible colour monitor with Equipment Management and Monitoring System (EMMS) and efficiency guidance | ● |
| KOMTRAX – Komatsu wireless monitoring system (3G)                                                                            | ● |
| Komatsu CARE™ – a maintenance program for Komatsu customers                                                                  | ● |
| Tool kit                                                                                                                     | ● |
| Grease gun holder                                                                                                            | ● |
| Provisions for fast fueling system                                                                                           | ● |

## CABIN

|                                                                       |   |
|-----------------------------------------------------------------------|---|
| Heated air-suspended seat: fabric, reclining, high backrest, turnable | ● |
| Seat belt with visible alert                                          | ● |
| High mount footrest                                                   | ● |
| Automatic air conditioner                                             | ● |
| Radio                                                                 | ● |
| Auxiliary input (MP3 jack)                                            | ● |
| 2 × 12 Volt power supply (120 W)                                      | ● |
| 1 × 24 Volt power supply                                              | ● |
| Viscous cab mounts                                                    | ● |
| Wiper front and rear window                                           | ● |
| Wipers doors                                                          | ● |
| Rear-view mirror (inside cab)                                         | ● |
| Heated rear window                                                    | ● |
| Sun visor (rear)                                                      | ● |
| Cup holder                                                            | ● |
| Lunch box holder                                                      | ● |

## TRANSMISSION AND BRAKES

|                                         |   |
|-----------------------------------------|---|
| Automatic hydroshift transmission       | ● |
| Torque converter with automatic lock-up | ● |
| Damper                                  | ● |
| Quick shift selection system            | ● |
| HSS hydrostatic steering system         | ● |
| Palm lever steering control (PCCS)      | ● |
| Decelerator pedal                       | ● |
| Brake pedal                             | ● |

## SAFETY EQUIPMENT

|                                                                                                   |   |
|---------------------------------------------------------------------------------------------------|---|
| Steel cab, meets ISO 3471 and SAE J1040, APR88 ROPS standards, as well as ISO 3449 FOPS standards | ● |
| Back-up alarm                                                                                     | ● |
| Warning horn                                                                                      | ● |
| Rear-view camera system                                                                           | ● |
| Battery main switch                                                                               | ● |
| Locks, filter caps and covers                                                                     | ● |
| Fire extinguisher                                                                                 | ○ |
| First aid kit                                                                                     | ○ |
| Emergency steering                                                                                | ○ |

## HYDRAULIC SYSTEM

|                              |   |
|------------------------------|---|
| Hydraulics for dozing blades | ● |
| Mono lever blade control     | ● |
| Hydraulics for ripper        | ● |

## LIGHTING SYSTEM

|                              |   |
|------------------------------|---|
| 2 working light, rear        | ● |
| 4 cab lights, front and rear | ● |
| 2 head lights                | ● |
| 1 ripper working light       | ● |

## ATTACHMENTS

|                                  |   |
|----------------------------------|---|
| Front pull hook                  | ● |
| Rigid drawbar                    | ● |
| Counterweight + hitch            | ○ |
| Multishank variable angle ripper | ○ |
| Giant variable angle ripper      | ○ |

## DOZER EQUIPMENT

|                                             |   |
|---------------------------------------------|---|
| Strengthened Sigmadozer® dual tilt, 9,4 m³  | ● |
| Strengthened Semi-U blade dual tilt, 9,4 m³ | ○ |
| Strengthened U blade dual tilt, 11,9 m³     | ○ |

Further equipment on request

- standard equipment
- optional equipment

Your Komatsu partner:

# KOMATSU

**Komatsu Europe  
International N.V.**

Mechelsesteenweg 586  
B-1800 VILVOORDE (BELGIUM)  
Tel. +32-2-255 24 11  
Fax +32-2-252 19 81  
[www.komatsu.eu](http://www.komatsu.eu)

EENSS20104 09/2020

**KOMATSU** is a trademark of Komatsu Ltd. Japan.

Printed in Europe – This specification sheet may contain attachments and optional equipment that are not available in your area.  
Please consult your local Komatsu distributor for those items you may require. Materials and specifications are subject to change without notice.  
AdBlue® is a registered trademark of Verband der Automobilindustrie e.V.

D155AX-8