

CITY

**HIGH PAYLOAD
LOW MAINTENANCE
3.5 TO 5.5 T CHASSIS**

LIFETIME EXCELLENCE



TECHNICAL SPECIFICATIONS


CITY

Standard	NF - DIN
Hook height	920-900 mm
Transport height	160 mm
Rail width	1060 mm
Lengths	2360 - 2510 - 2760 - 2910 - 3110 mm
Average weight	355 kg
Rear locking	Hydraulic
Pressure	25 Mpa
GVW	3.5 to 5.5 t

CITY UNIVERSEL

available in 2023

Standard	NF - GUIMA
Hook height	920-900 mm
Transport height	160 mm
Rail width	850 - 1060 mm
Lengths	2360 - 2510 - 2760 - 2910 - 3110 mm
Average weight	355 kg
Rear locking	Hydraulic
Pressure	25 Mpa
GVW	3.5 to 5.5 t

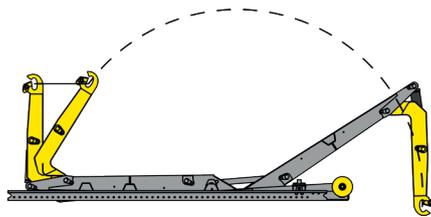

YOUR BENEFITS



LIGHTWEIGHT FOR INCREASED PAYLOAD

- Makes daily trips more profitable: The CiTy is the lightest on the market thanks to an elegant design with a stronger resistant steel conception and a maximum weight optimization of the mounting parts (eg. mainvalve support).

SERVICE FRIENDLY CONCEPTION

- **Minimal maintenance** thanks to self lubricating bushes, resistant to wear even under heavy loads.
- **Easier maintenance** and reduced downtime with easy access to all components.
- **Dense Palfinger Service network** for complete, fast and optimal support.



VERSATILITY

- Make a profitable investment by using one truck for multiple activities. Allows the loading, unloading and tipping of different containers.
- The City is capable of handling up to 3 t of payload depending on the chassis and container.

FOR URBAN APPLICATIONS

The CiTy performs well in confined locations: the small size of the truck container allows driving through very narrow streets.

- CRAFTSMEN: gardening, building, waste collection
- PUBLIC SERVICES: municipalities

THE LIGHTEST ON THE MARKET FOR CHASSIS FROM 3.5 TO 5.5 T GVW



INCREASED LIFETIME

- **Efficient mounting:** The screwed mounting of the brackets and accessories- all treated against corrosion - increases the lifetime of the CiTy and allows quick replacement of the accessories.
- **Reliability:** The CiTy is ex-works final coated before assembling for efficient protection of main components: Grey unit, black cylinders, yellow rear pulleys and arm. Small mechanical parts are zinc nickel treated.

EASY DRIVE CONTROL

- **Ergonomic and intuitive cab controls** for simple and reliable operations.
- 2 additional functions: Diagnostic mode and emergency mode.



SAFETY

- Equipment meets all requirements of European directives on safety and security.
- Automatic safety shutdown of the system after 2 minutes without activation.

KP-CITY+EN
03/2022

Applications shown in the leaflet do not correspond to the standard specifications.
Design and specification are subject to change without prior notice.
Country-specific regulations must be considered for installation.
We reserve the right to change design and specification without prior notice.